




第3代明欣LED投光灯 BVPI50 G3



Oct. 2023

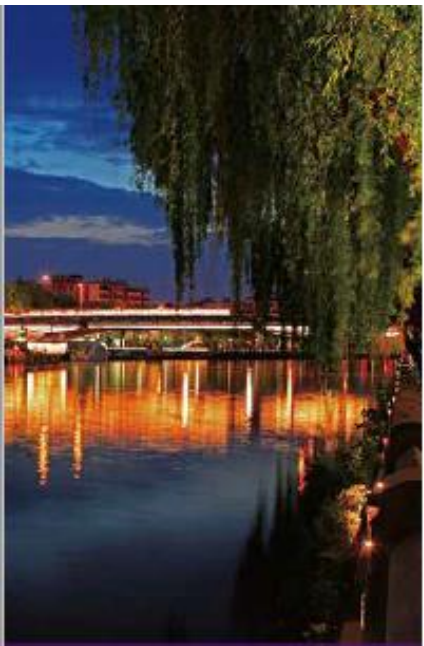

环境照明



广场照明



景观照明



广告牌照明



停车场照明



建筑照明



10-30w



50-70w



100-200w





通过严格的安全及可靠性测试，符合CQC标准。
即使在-40度低温，50度的高温或者高湿度的环境下反复
开关测试，表现依旧稳定

产品规格

明欣LED投光灯 BVP150 G3



	BVP150 G3							
功率	10W	20W	30W	50W	70W	100W	150W	200W
光通量 (4000/6500k)	1000lm	2000lm	3000lm	5000lm	7000lm	10000lm	15000lm	20000lm
发光效率	100lm/w							
功率因数	0.9							
SDCM	<=6							
显指	>=80							
色温	3000K, 4000K, 6500K							
光束角	SWB (110±10°)							
输入电压	220V-240V; 50/60 Hz							
LED驱动	DoB							
外部接线	0.3m 长, 3*1mm ²			0.6m 长, 3*1mm ² 粗				
外壳材料	压铸铝, 颜色RAL9011, 钢化玻璃							
寿命	20KHrs L70B50 @25°C							
工作温度	-40°C to +50°C							
绝缘等级	I类绝缘							
浪涌保护	1/2KV					2/4KV		
IP、IK防护等级	IP65 / IK06							
THD	<20%							
证书	CQC, CE, CB							
包装数 (大箱内小盒数)	36	36	24	24	12	12	6	6

BVP150 G3 vs. BVP151 G3 区别

明欣LED投光灯 BVP150 G3

BVP151 G3



- 光效120lm/w
- 寿命: 5万小时 (L70@25°C)
- IK 07 (50/70w), IK08 (100-200w), 玻璃进一步强化
- 正面视觉--竖版; 全系列带鲨鱼鳍散热筋
- 有三色温手拨开关型号可选
- 外部导线更长

	BVP151 G3		BVP150 G3	
可替代 关系	50w	6,000 lm	70w	7,000 lm
	150w	18,000 lm	200w	20,000 lm



BVP150 G3




- 光效 100lm/w
- 寿命: 2万小时(L70@25°C)
- IK06
- 大瓦数带鲨鱼鳍散热筋
- 正面视觉—横版

产品尺寸及安装空位

明欣LED投光灯 BVP150 G3

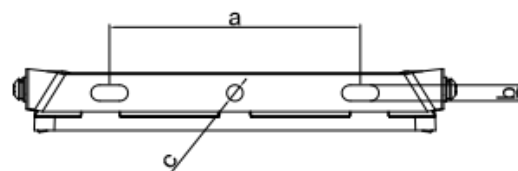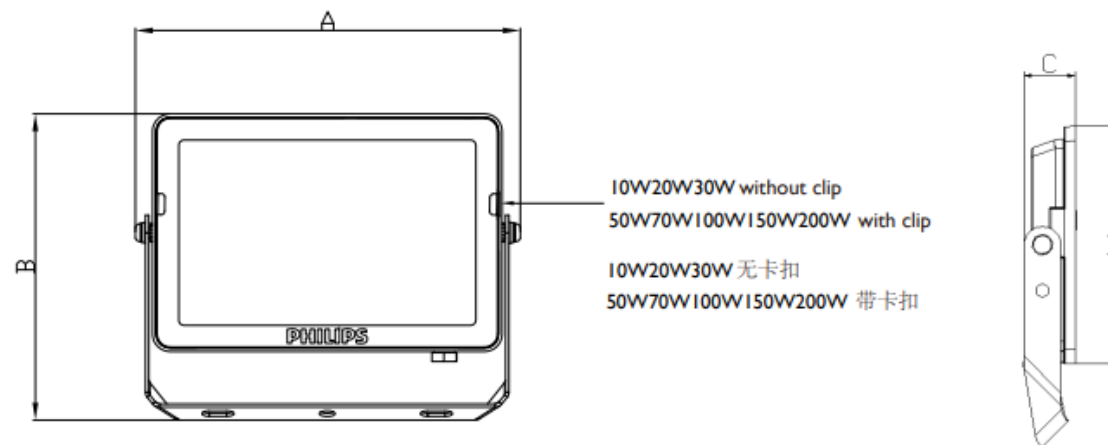

Type	10W	20W	30W	50W	70W	100W	150W	200W
a (mm)	45	75	100	125	125	160	200	210
b (mm)	5	5	6	8.5	8.5	8.5	8.5	10.5
c (mm)	5.5	5.5	6.5	9	9	9	9	11

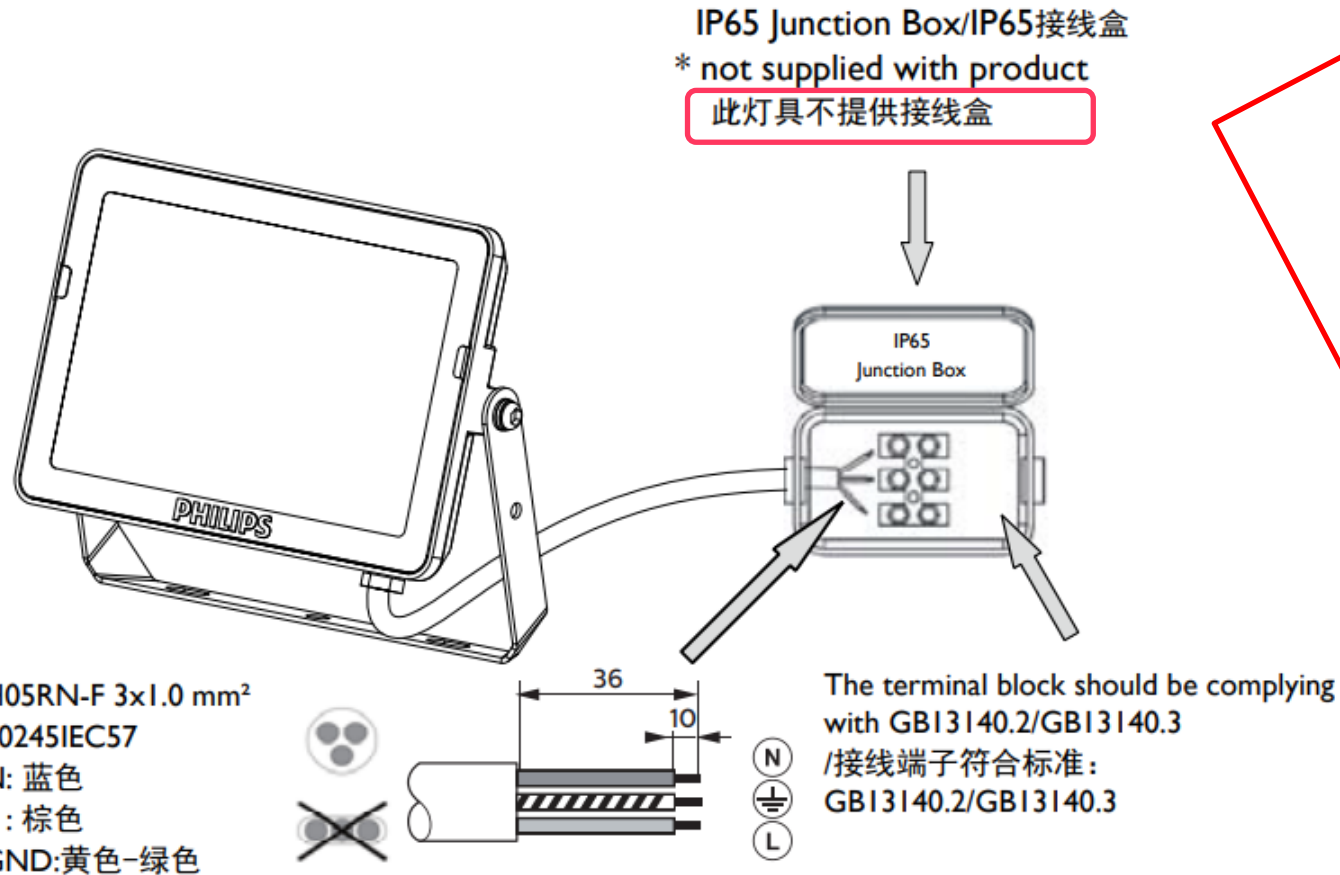

为避免雨天开关灯具温差产生的电线虹吸现象，**请务必使用防水接线盒** (另购)

- 请使用IP65或更高IP等级的接线盒/接头进行接线。
- 灯具不得在水下、湿地、雪等潮湿条件下使用。
- 电线连接也不应在浸水潮湿的条件下使用，如水、湿地、雪等。或者使用IP68等级的接线盒
- 如果未按照给定的安装说明操作，则保修无效。
- 本产品不提供任何接线盒/接头。
- 如需进一步了解，请联系制造商。

12nc	描述	功率	色温	装箱数
911401811186	BVP150 LED10/WW PSU 10W SWB G3 CN	10	3000K	36
911401821186	BVP150 LED10/NW PSU 10W SWB G3 CN	10	4000K	36
911401831186	BVP150 LED10/CW PSU 10W SWB G3 CN	10	6500K	36
911401812186	BVP150 LED20/WW PSU 20W SWB G3 CN	20	3000K	36
911401822186	BVP150 LED20/NW PSU 20W SWB G3 CN	20	4000K	36
911401832186	BVP150 LED20/CW PSU 20W SWB G3 CN	20	6500K	36
911401813186	BVP150 LED30/WW PSU 30W SWB G3 CN	30	3000K	24
911401823186	BVP150 LED30/NW PSU 30W SWB G3 CN	30	4000K	24
911401833186	BVP150 LED30/CW PSU 30W SWB G3 CN	30	6500K	24
911401814186	BVP150 LED50/WW PSU 50W SWB G3 CN	50	3000K	24
911401824186	BVP150 LED50/NW PSU 50W SWB G3 CN	50	4000K	24
911401834186	BVP150 LED50/CW PSU 50W SWB G3 CN	50	6500K	24
911401815186	BVP150 LED70/WW PSU 70W SWB G3 CN	70	3000K	12
911401825186	BVP150 LED70/NW PSU 70W SWB G3 CN	70	4000K	12
911401835186	BVP150 LED70/CW PSU 70W SWB G3 CN	70	6500K	12
911401816186	BVP150 LED100/WW PSU 100W SWB G3 CN	100	3000K	12
911401826186	BVP150 LED100/NW PSU 100W SWB G3 CN	100	4000K	12
911401836186	BVP150 LED100/CW PSU 100W SWB G3 CN	100	6500K	12
911401817186	BVP150 LED150/WW PSU 150W SWB G3 CN	150	3000K	6
911401827186	BVP150 LED150/NW PSU 150W SWB G3 CN	150	4000K	6
911401837186	BVP150 LED150/CW PSU 150W SWB G3 CN	150	6500K	6
911401818186	BVP150 LED200/WW PSU 200W SWB G3 CN	200	3000K	6
911401828186	BVP150 LED200/NW PSU 200W SWB G3 CN	200	4000K	6
911401838186	BVP150 LED200/CW PSU 200W SWB G3 CN	200	6500K	6

Signify