



SPC
数据输出

数显内卡规



2151-35

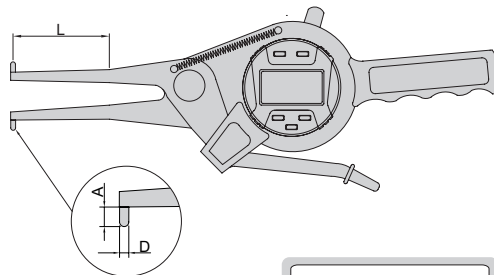

(mm)

| 型号 | 测量范围 | 分辨率 | 精度 | L | A | D |
|-----------|--------------------|----------------|---------|-----|----|------|
| 2151-35 | 15-35mm/0.6-1.4" | 0.01mm/0.0005" | ±0.04mm | 50 | 3 | Ø3 |
| 2151-AL35 | 15-35mm/0.6-1.4" | 0.01mm/0.0005" | ±0.04mm | 200 | 3 | Ø3 |
| 2151-55 | 35-55mm/1.4-2.2" | 0.01mm/0.0005" | ±0.04mm | 80 | 6 | Ø3 |
| 2151-AL55 | 35-55mm/1.4-2.2" | 0.01mm/0.0005" | ±0.04mm | 250 | 8 | Ø3 |
| 2151-75 | 55-75mm/2.2-3" | 0.01mm/0.0005" | ±0.04mm | 90 | 8 | Ø3 |
| 2151-AL75 | 55-75mm/2.2-3" | 0.01mm/0.0005" | ±0.04mm | 250 | 8 | Ø3 |
| 2151-95 | 75-95mm/3-3.8" | 0.01mm/0.0005" | ±0.04mm | 100 | 8 | Ø3 |
| 2151-115 | 95-115mm/3.8-4.6" | 0.01mm/0.0005" | ±0.04mm | 120 | 10 | Ø3.2 |
| 2151-135 | 115-135mm/4.6-5.4" | 0.01mm/0.0005" | ±0.04mm | 120 | 10 | Ø3.2 |

- 模拟指针显示
- 显示屏可旋转320°
- 按键功能: 设置公差并显示Go/No-Go, 设置初始值, 测量方向转换, 最大值/最小值/跳动, 公/英制转换, 相对/绝对测量转换
- CR2032电池, 自动关机
- 数据接口
- 可选附件: 数据传输(第1章)